



HAGAN

**(ENG) USER'S AND MAINTENANCE
GUIDE-BOOK**

CORE BINDING

(M.Y. 2018) – 350 GRAMS



 WARNING! DANGER!

The removal of the "SEAL OF LIABILITY ", firmly affixed to the product by the manufacturer HAGAN SKI Ges.m.b.H.

MUST BE PERFORMED

exclusively by the original user himself.

The removal of the "SEAL OF LIABILITY " is the proof of a full, direct, careful and aware acknowledgement of the entirety of the parts forming the "USER'S AND MAINTENANCE GUIDE BOOK" which is inserted into the packaging of the product itself, in particular the full acknowledgment of the entirety of the disclosures contained into the warning boxes underlined by the words

"  WARNING! DANGER!"

regarding the risks raised by the product use, for the user it-self and/or third parties, and all the producer "LIABILITY LIMITATIONS" clauses.

 WARNING! DANGER!

-HIGH POWER PERMANENT MAGNETS!


-USE DENIED TO PACE-MAKER-PROVIDED USERS!



The **HAGAN®** ski touring bindings are shaped following the most sophisticated design principles and highest level mechanic techniques. **HAGAN® bindings are completely designed, developed and manufactured in Fiorano Modenese (Modena, Italy).** They comply with the exigencies of the top athletes and those who are constantly looking for lightness, performances and reliability.

However, to this purpose, we invite you to read all the instructions carefully, in order to ensure your own safety.

1 | BINDING MAIN PARTS IDENTIFICATION

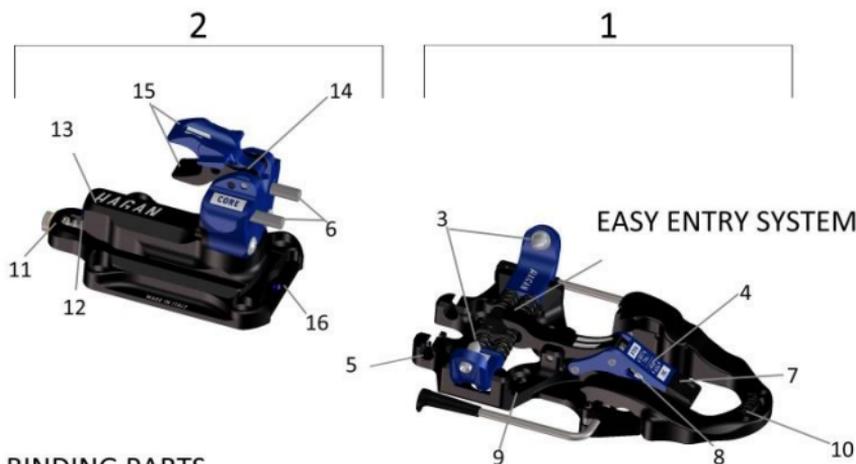

BINDING PARTS

- | | |
|--------------------------|-----------------------------|
| 1. TOE PART | 9. TOE BASE PLATE |
| 2. HEEL PART | 10. FRONT BRAKE |
| 3. HOOKING PINS | 11. HEEL POSITIONING SCREW |
| 4. FRONT LOCKING LEVER | 12. ELASTIC RESPONSE SYSTEM |
| 5. CRAMPONS SLOT | 13. Mz ADJUSTMENT SCREW |
| 6. HEEL HOOKING PINS | 14. My ADJUSTMENT SCREW |
| 7. FRONT LEVER PROTECTOR | 15. MAGNETO HEEL FLAPS |
| 8. LEASH HOLLOW | 16. FREE-RIDE SPACER SLOT |

SCREWS



16 SCREWS (13 MM)

What will you find in the Product box?

2 TOES, 2 HEELS, 16 SCREWS 13 mm, 1 "USER'S AND MAINTENANCE GUIDE BOOK", 1 4 MM SPACER.

2 | GENERAL WARNINGS AND RECOMMENDATIONS FOR THE USER



WARNING! DANGER!

Before any use, make sure of your full and responsible comprehension of the entirety of this

“USER’S AND MAINTENANCE GUIDE BOOK”.

In case of doubts or uncertainty and, in general for any kind of communication, we kindly ask you to contact our offices at the e-mail address info@hagan-ski.com, for integrations or additional explanations regarding this “User’s and Maintenance Guide”



WARNING! DANGER!

- HAGAN® binding model “**CORE BINDING**” has been designed, developed and produced with the only purpose of extreme lightness and performance: these factors may influence the safety characteristics of the product itself, such as the quality or repeatability of the release.
- The HAGAN® binding model “**CORE BINDING**” **DOES NOT COMPLY WITH ANY DIN/ISO SAFETY STANDARD (in particular it does not comply with DIN/ISO 11088, nor DIN/ISO 13992)**: under some conditions, the use of this product may represent a danger for the user itself, due to the unpredictability of the release in case of need or the possibility of undesired releases in dangerous situations.
- “**CORE BINDING**” provides customizable release systems for the adjustment of the **LATERAL (Mz) and VERTICAL (My)** release which, in case of perfect setting, may reduce the risk of injury for the limbs under the femur.
- The use of a front skibrake may modify the Mz release values of the binding: always set the binding when the brake is active in down-hill position, as show at paragraph 6.1, image 3.
- By removing the “**SEAL OF RESPONSIBILITY**” from the binding, the user consciously assumes all the responsibilities arising from the use of the product itself, and relieves the producer of any eventual liability on damages caused to the user itself, goods or third parties during the use of the product.



WARNING! DANGER!

The ORIGINAL USER assumes the full responsibility to deliver this “USER’S AND MAINTENANCE GUIDE BOOK” to eventual secondary users (even temporary users) of the product it-self and to verify that they received a full and correct training on the use-modalities, besides having fully and unequivocally understood all the parts composing this “USER’S AND MAINTENANCE GUIDE BOOK”.

- Please, be aware that skimountaineering, like many other high mountain activities, is a DANGEROUS SPORT, that may cause injuries to the user and/or third parties; difficult situations are often unpredictable or dangerous; never overestimate your capabilities, never ski if sick, wounded or under the influence of alcohol, medicines or drugs.
- **HAGAN®** bindings are realized and tested according to ski boots with "TECH" inserts, with standard brand-new hooking plates and original dimensions; using ski boots with **nonstandard** inserts or with very worn inserts may change the bindings functionality and can create a risk for the user: before each use check the general wear of equipment and, in case of doubt, contact an authorized **HAGAN®** dealer for a check-up or reparation.
- The adjustment of the release systems must be performed by a dealer or technician specialized into skitouring bindings installation and adjustment, in particular equipped with all the machineries needed to test the correct adjustment of the release systems/values: A SELF MADE adjustment is highly unrecommended due to the high risk of errors raising from incompetence, incapacity or distraction, with consequent danger for the user.
- Any setting or adjustment performed by untrained staff or by a unspecialized center may raise the risk of injuries for the user and cause the cancellation of the warranty on the product itself.
- The adjustment of the release systems, such as the adjustment of the binding positioning on the ski, must be performed exclusively with the boots that will be used with the binding.
- The adjustment value is valid only with the use of boots which have no additional contact points with the binding out of the two toe pins and the two heel pins, except for those bindings which offer the FREERIDE SPACER, even as an accessory: in this case, the spacer represents an additional contact point with the boot that, in case of perfect setting, does not modify the release performances of the binding.
- The use of a front ski-brake may modify the Mz release values of the binding: always set the binding when the brake is in downhill mode, as show at paragraph 6.1, image 3.
- The ski structure may influence the release performance of the binding: in case of replacement with a new and/or different ski model, it is necessary to control the adjustment of the release systems, and proceed with a new setting.
- Due to the fast variation of the environmental conditions (temperature, ice, dirt, water and debris) the release system adjustment may vary during the time; these variations may be also caused by a wrong or too long storage of the gear: after a very intense use, and anyway, each 2 months, the bindings adjustment must be checked by a specialized center for the release systems adjustment.
- During transport (ex: car roof, backpack, bike etc.) the bindings could be corroded by dirt or salt that may change the correct functioning of the binding: always protect the bindings by these external agents during transport with adequate gear.
- In uphill mode these bindings are fully locked on the boot and do not provide any release function.
- Check that, once hooked the toe part, the pins are correctly inserted into their seats on the boot strongly moving the ski with the boot tip.
- Before performing a downhill please remember to place the toe locking lever in downhill position. If this operation fails, in case of fall the binding cannot release the boot and the user could be seriously injured. A toe release with the front lever locked in uphill mode would lead to heavy structural damages on the product, with great danger for the user (**please note point 6.3**).
- Before each use check that the binding or other accessories are defective, worn or have damaged parts, that the release system is perfectly working and that the bindings have not been contaminated by debris or ice/snow.
- Never use bindings with damaged parts: if there is any defective or broken part, or any doubt is raising in your mind in regards to the state of your bindings, immediately stop the use of the product and promptly reach the nearest authorized dealer in order to receive assistance and get a perfect solution for any of your doubts or damages and/or defects raised on the product.
- Before any use check that the bindings base surfaces are correctly fixed to the ski, that the screws are correctly tightened, and/or the ski-structure is not damaged but results completely flat in the mounting area in order to hallow a perfect support for the binding: if one or more of these events occur, it may cause structural damage to the bindings with subsequent danger for the user or third parties.
- The use of a brake system is compulsory, **in order to limit the risk** of ski loss and/or create damages to goods or third parties. An alternative brake system is represented by the SBC02 KEVLAR® CORE LEASH.
- In case of deep fresh snow or hard snow, the efficiency of any SKI-BRAKE is very limited: in these snow conditions we suggest the use of a SBC02 | KEVLAR® CORE LEASH.
- **Any MODIFICATION to components and IMPROPER USE of HAGAN® bindings may invalidate the product warranty and increase the risk of injuries for the user and/or third parties.**
- Use of non-original **HAGAN®** ACCESSORIES may cause damages to the bindings, user or third parties.
- Safely keep these user's guide and check it in case of any doubt.

3 | MOUNTING AND SETTING


WARNING! DANGER!

BUSHINGS COMBINATION FOR M05 JIG AND M05D INSERT:


TOE: P1-P1-P1-P1

HEEL: H-H-H-H


- The installation of any HAGAN® binding must be performed by an **AUTHORIZED DEALER**, equipped with all the tools needed to realize a state of the art installation, including the original HAGAN® **drilling jig** (COD. M05 or following) dedicated to the product that must be installed on skis; in case of M05 drilling jig use, you should mount the M05A or M05D back insert on the jig and use the **P1-P1-P1-P1**
- bushings for the toe and **H-H-H-H** for the heel plate; always check the jig user guide before performing any drilling operation.
- A self-made installation is **NOT** recommended due to the high-end technical abilities and knowledge needed to realize a state of the art installation and to the possible damages and/or risks rising from a wrong/imperfect installation. In case that the user takes over the responsibility of a self-made installation, it is necessary to verify the presence in the box of the full list of parts listed at page 23 of this guide book; it is therefore possible to download a drilling template from the product web page, print it and then follow all the instructions and recommendations.
- In both cases (installation provided by an authorized dealer or self-made installation), it is very easy to check the correct installing distance between the back metal insert of the boot and the vertical face of the heel part included in between the two hooking pins using the 4 mm spacer provided with the binding, as shown in picture 1,2 and 3.



PICTURE 1



PICTURE 2



PICTURE 3

- A wrong setting distance in between boot and binding may create an early and sudden fail of the binding, creating irreparable damages to the ski/binding/boot system and/or eliminate/modify the release function in case of fall with consequential damages to the athlete and third parties.
- Always check that the penetrating length of the screws fits the depth of the drilled holes, and anyway with the height of the ski in the mounting area; otherwise, use proper screws or contact HAGAN® at info@hagan-ski.com.
- The binding must be installed only **ON NEW SKIS**, which present an absolutely flat mounting area and a structural reinforcement for the screws tightening and anchoring.
- **Each boot has its own geometry: always use the boot used for installation, setup and check of the correct functionality of the binding in combination to the binding itself.**

4 | HOW TO ADJUST THE Mz and My RELEASE SYSTEMS

WARNING! DANGER!

The HAGAN® binding model “CORE BINDING” **DOES NOT COMPLY WITH ANY DIN/ISO SAFETY STANDARD** (in particular it does not comply with DIN/ISO 11088, nor DIN/ISO 13992).


“CORE BINDING” is anyway provided of adjustable release systems for the adjustment of the **LATERAL (Mz) and VERTICAL (My)** release which, in case of perfect setting, may reduce the risk of injury for the limbs under the femur.

- The values shown by the setting scale must be considered as **approximate**: the real release value could significantly vary from that one displayed on the scale.
- The correct setting of the release systems Mz and My (LATERAL and VERTICAL release) must be performed by a service center specialized in the touring binding setting and adjustment, in particular equipped with all the needed machinery to test the correct and real release value obtained as consequence of the setting.
- A self-made adjustment and/or performed by unqualified technicians and/or performed without the help of the correct testing machinery is not recommended.
- During downhill skiing, the front lever must be placed in downhill mode, as shown at paragraph 6.4: if not like that, the Mz release system would be fully disabled, with consequently higher risk of injuries for the user.


- The adjustment of the Mz release system must be realized through screwing and unscrewing the red metal screw shown by the arrow at PICTURE A (insert PH2, good quality). The set value is visible into the side window shown at PICTURE B. (ex. Value =7)
- The adjustment of the My release system must be realized through screwing and unscrewing the top metal screw shown by the arrow at PICTURE C. The set value is shown by the yellow marker on the graduated scale. (ex. Value=12).



PICTURE A



PICTURE B




PICTURE C

5 | HOW TO SET THE HEEL POSITION ON THE ADJUSTMENT PLATE

WARNING! DANGER!

The binding model "CORE BINDING" is provided with the "E.R.S." system (ELASTIC RESPONSE SYSTEM), developed to support an aggressive and heavy charge skiing style with an elastic response to compressions and jumps, improving the ski control, precision and flex performance.

"E.R.S." does not eliminate the need of a gap of 4 mm in between boot and heel: to consider the imposed distance is a compulsory point in order to miss undesired malfunctions and /or damages to the material, with consequent dangers for the user or third parties.

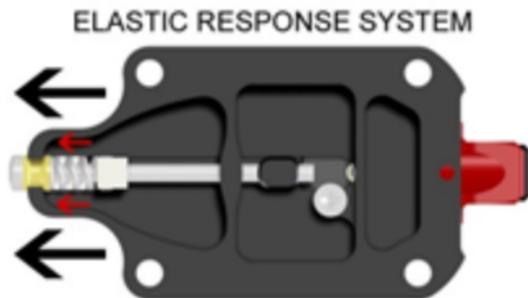

WARNING! DANGER!

The adjustment of the heel part must be done manually with a high quality insert: it is strictly forbidden to use an electric screwdriver, which use may lead to damage the screw head and/or to bring the system to overrange.

It's absolutely forbidden to use the binding with the heel part in overrange: never exceed the "STOP" lines during the heel settings: in case of exceeding, the system could be damaged causing problems to the heel functioning and possible danger for the user.

- The adjustment of the heel part on the adjustment plate can be performed through the back screw, shown by the arrow at **PICTURE D**, by using a high quality PH2 insert.
- The adjustment range is about 30mm: from the central position "0", **the heel offers +15 and -15 mm**, as shown at **PICTURE E**.



ADJUSTMENT SCREW

PICTURE D



PICTURE E

6 | PRACTICAL USE INFORMATIONS


WARNING! DANGER!

- We highly recommend to strictly follow the operations described and illustrated in this chapter: a wrong comprehension or execution of these operations may raise the risk of damages and injuries for the user, goods or third parties.
- Before performing any operation, always verify that boots and bindings are fully free from dirt, debris or any other entity which may modify the correct functioning of the system.
- Before performing any operation, always verify the correct functional state of the binding, such as the wear and tear of the complete binding system: in case of doubts regarding the perfect functionality of even one of the parts of the binding, immediately stop any use and reach the nearest authorized dealer for a detailed check and eventual revision of any damaged part.
- These bindings include some springs systems, some of which are really powerful: a involuntary activation of one or more of these spring systems may lead to damages to the user or third parties; always handle the binding with care during any kind of operation.
- **Keep out of the range of children.**

6.1 | SKI-BRAKE ACTIVATION

The brakes provided with CORE BINDING are the only brakes which do not need to be switched off during the uphill, resulting always active and ready to brake the ski descent.

1. Hook the boot tip to the binding as described at paragraph 6.3 and 6.4 of this manual.
2. Push on the front part of the ski brake ("PUSH" zone) up to the stabilization of the mechanism.
3. Proceed to the uphill mode or downhill mode as described at paragraph 6.3 or 6.4.

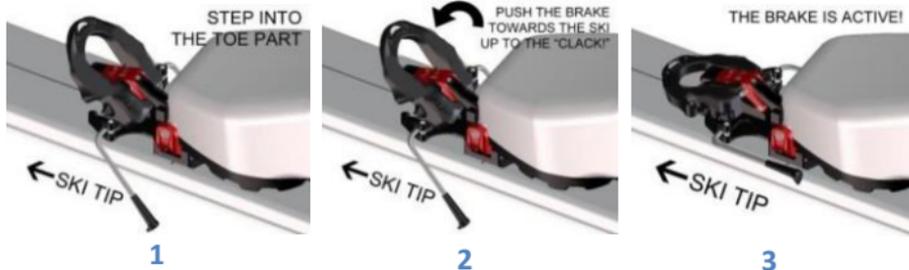

6.2 MAGNETO® HEEL FLAPS


⚠ WARNING! DANGER!



The "CORE BINDING" heel parts are provided with permanent highpower magnets: the use of this binding model is **ABSOLUTELY FORBIDDEN** to PACEMAKER USERS, or any other system which could be damaged by magnets.

The stabilization of the heel flaps is driven by a highpower magnetic system. This system, extremely light and reliable, grants to select the different raised position with the poletip or a soft touch of a hand.

The MAGNETO HEEL FLAPS® system grants 5 different walking positions, two of which ready without turning the heel part:

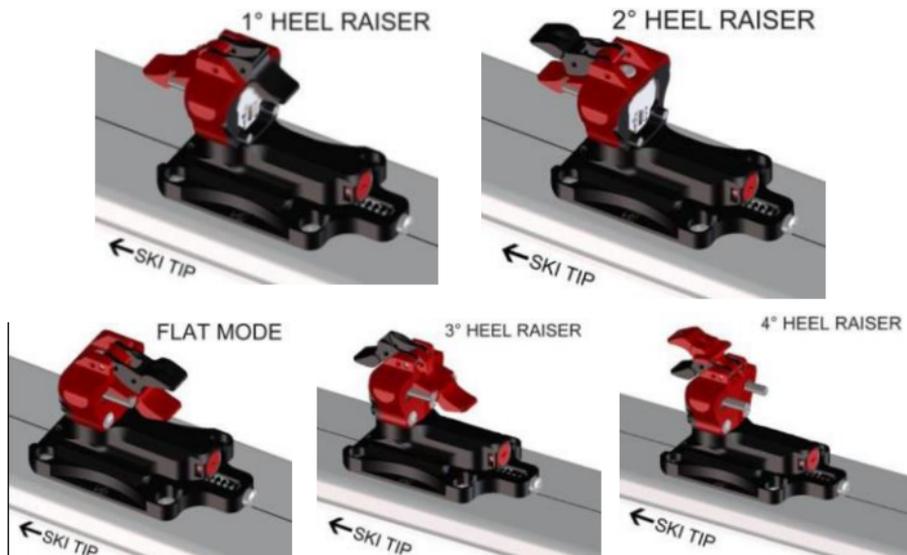


6.3 | UP-HILL MODE

WARNING! DANGER!


In this modality, the **toe part results FULLY locked on the BOOT TIP**: this means that in case of fall, avalanche or other unpleasant situations that may occur to the user, there will never be a separation between boot and binding, with high danger for the user that may be dragged down by an avalanche together with the skis, or receive damages in case of simple fall or accident.

- In case of experiencing a release of the boot while the binding toe part is set on the "UPHILL MODE" as a consequence of a strange happening/particularly high stress (fall, avalanche, slippage etcetc....) immediately stop any use and reach the nearest authorized dealer for a detailed check and eventual revision of any damaged part.
- During uphill, an impact with foreign body or a particular happening may deactivate the uphill locked mode, moving the front lever to the downhill mode. This event creates a great danger for the user who may experience undesired pre-releases with consequent danger of fall or slippage, with possible damages to the skier itself and/or third parties: frequently check the lever positioning during your activities.


- Check that the heel lays in one of the positions shown at paragraph 6.2.
- Check that the toe is the same position shown at **PICTURE F**, ready to receive the boot; if not like that, manually press on the front lever in order to get the correct positioning of the toe.
- Move the boot tip towards the binding toe part, placing the two seats of the tech insert of the boot in correspondence of the hooking pins of the binding. From this position, vertically press the boot tip activating the binding closure over the boot. (**PICTURE G/H**).
- Rotate twice the boot tip on the toe part in order to check the correct connection between boot and binding (**PICTURE H**).
- Activate the front brake as described at paragraph 6.1.
- Slightly pull the front lever towards you up to the stabilization of the front lever on the blocked mode as shown at **PICTURE I**: in this way the toe release system will be disabled.



PICTURE F



PICTURE G



PICTURE H



PICTURE I




PICTURE L

6.4 | DOWN-HILL MODE


WARNING! DANGER!

- The correct use modality for the "DOWN-HILL MODE" is precisely reported at paragraph 6.4 of this "USER'S AND MAINTENANCE GUIDE BOOK"; this modality may perform a boot release in case of ruinous falls: it is **STRONGLY NOT RECOMMENDED** to SKI with other modalities different from those suggested!
- It stays under **FULL RESPONSIBILITY OF THE USER** to decide which use behaviour or use modality creates a lesser risk for its own and third parties safety, evaluating each single faced situation.
- **While skiing in downhill mode, an impact with foreign body or a particular happening may accidentally enable the uphill walking mode, moving the front lever to the locked position. This event creates a great danger for the user because the binding will never release the boot in case of accident, with possible injuries to the skier itself and/or third parties: frequently check the correct lever positioning during your activities.**


- Check that the heel is in position as in **PICTURE L**.
- Check that the toe is the same position shown at **PICTURE M**, ready to receive the boot; if not like that, manually press on the front lever in order to get the correct positioning of the toe.
- Move the boot tip towards the binding toe part, placing the 2 seats of the tech insert of the boot in correspondence of the hooking pins of the binding. From this position, vertically press the boot tip activating the binding closure over the boot (**PICTURE N/O**).
- Rotate twice the boot tip on the toe part in order to check the correct connection between boot and binding. (PICTURE O).
- Activate the front brake as described at paragraph 6.1.
- Check that the toe front lever is **UNLOCKED** for the downhill position, as show at **PICTURE O**; if not like that, slightly press the front lever in order to get the correct positioning, as shown at **PICTURE O**.
- Press the boot heel towards the heel hooking pins, up to the full hooking as shown at **PICTURE P**.




PICTURE M



PICTURE N




PICTURE O



PICTURE P



PICTURE Q



PICTURE R

6.5 | HOW TO GET OUT FROM THE BINDING

WARNING! DANGER!

- Before proceeding with the opening operations, firmly keep with a hand the ski you are going to release from the boot in order to avoid an uncontrolled ski loss that would represent a great danger for the skier and/or third parties which may be hit by the ski.


- By the uphill position, press on the toe front lever as show at **PICTURE S**, moving it to the downhill position, shown at **PICTURE T**.
- By the downhill position, press again the toe front lever as shown at **PICTURE T**, in order to fully open the toe part and release the boot.
- Lift and rotate the foot tip moving the boot forward in order to get out from the heel part as shown at **PICTURE U**.



PICTURE S



PICTURE T




PICTURE U

7 | HOW TO USE THE HAGAN® CRAMPONS

WARNING! DANGER!

- The crampons must be used only in certain weather conditions; using crampons with wrong snow/ground conditions could damage the crampons or the binding and can cause risks of injury for the user and/or third parties.
- Do not force the crampon if not correctly placed in its slot.

- Manually enter the crampon in the opposite hook, positioning it at 90° on the ski, as shown at **PICTURE V**.
- Once correctly inserted, release the crampon, to obtain the position shown at **PICTURE Z**.

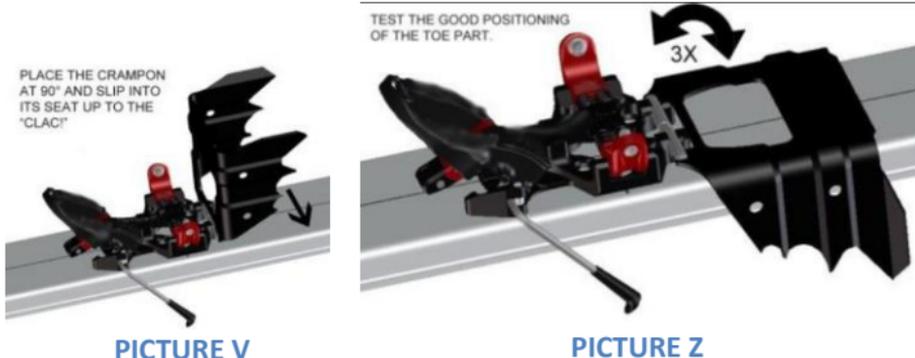

8 | "CORE BINDING" AVAILABLE ACCESSORIES

The HAGAN® range is completed by a series of accessories that increase comforts and performances of our bindings; information, video tutorials and instructions at the webpage of the product.

9 | CARE, MAINTENANCE AND STORAGE

- **To preserve optimal performance of the product, including the release systems efficiency, it is highly recommended to periodically (EACH 3 MONTHS OF USE) lubricate the joints or rotation points with a proper lubricant.**
- After a medium to long inactivity period it is necessary to check the status of general wear and tear of the binding and the correct lubrication of the product.
- Carefully clean the binding after each use with distilled water from dirt, salt, sand or debris; do not use spears or harsh chemical solvents.
- Please keep the ski with closed binding in order to preserve the elasticity of the springs in a dry and protective place; avoid excessive heat.
- Do not make modifications or tampering to the bindings, this will lead to the cancellation of the warranty; these actions could even compromise the functionality of the product and increase the risk of break or injury for the user and/or third parties.
- **Within 4 years after purchasing the product**, and then every two years, it is necessary to have an OFFICIAL HAGAN® CHECK in order to check worn or damaged parts, and if necessary to SERVICE the product with an official REVISION.

Contact a HAGAN® AUTHORIZED DEALER to get infos regarding timing and method of revision.

10 | HAGAN® WARRANTY TERMS

HAGAN® guarantees that the product is free from manufacturing or material defects for a period of two years (2) starting from the date of purchase throughout an authorized dealer of **HAGAN®** products. The effective date of the warranty must be supported by the proof of purchase: without the original proof of purchase, the temporal effect will start from the day when the product has left the **HAGAN®** warehouses.

The 24 months warranty is applied to each product which represents a conformity defect, even if used correctly, respecting its intended destination of use and all the elements present in the provided documentation for the use explanation.

This warranty is granted only to Privat consumers (a person who buys goods for purposes not related to his professional activity, or making a purchase without indicating a reference to VAT).

Known that the **HAGAN®** bindings are NOT CERTIFIED by any certification institute, since they DO NOT COMPLY WITH ANY DIN/ISO SAFETY STANDARD, the warranty is not valid in case of:

- Wrong installation or installation performed by a non **HAGAN®** authorized subject;
- Inappropriate use;
- Lacking periodical maintenance as stated in this user guide;
- Carelessness;
- Inexperienced use;
- Modifications applied without the producer authorization;
- Purchase through a unauthorized Dealer;
- Purchase by a non-original subject;
- Overuse.

HAGAN® does not recognize other expressed or implied warranties other than those specified in this paragraph and does not recognize damages raising by:

- Wrong mounting;
- Standard wear and tear, including chipping;
- Wrong set up;
- Use in combination with inadequate gear per definition or due to wear and tear;
- Use in combination with boots non complying with the required standard;
- Impacts or collisions with foreign bodies;
- prejudices not directly and necessarily related to the product;
- prejudices connected to the noncomplying to any DIN/ISO safety standard;
- prejudices anyway avoidable with due caution required by the raw mountain environment with low urbanization;
- prejudices increased by the damaged subject behaviour.

For a warranty activation – which may involve a choice of **HAGAN®** to substitute or repair the product – the customer must reach one of the **HAGAN®** AUTHORIZED DEALERS, and in case that all the warranty conditions will be satisfied, a warranty operation will be activated.

In case that the application of the **HAGAN®** WARRANTY PROCEDURE requires the entire return of the product, the product itself must be returned inside the original box, complete in all its parts.

No refund can be asked to **HAGAN®** for eventual delays for the service operations under warranty conditions.

The “DEMO/TEST” bindings are intended for an unusual and particularly intensive use, which may modify the lasting performance of the product, accelerating the wear and tear of the product itself. The warranty period on the “DEMO/TEST” products is reduced to one (1) year after the purchasing date;

Free-of-charge or loan of use products are fully excluded by any warranty application.

For any further information and/or clarification regarding the functionality of the products and the activation of the warranty operations, please contact the **HAGAN®** SERVICE TEAM at: info@hagan-ski.com

WARNING! DANGER!

The user itself is fully aware that – due to the high performance features and the need of an extreme weight save – the HAGAN® bindings

DO NOT COMPLY with any DIN/ISO SAFETY STANDARD

nor DIN/ISO 11088,nor DIN/ISO 13992 .

By purchasing such products in a conscious and informed way as provided by the “USER’S AND MAINTENANCE GUIDE BOOK” of the product itself, the user expressly accepts without any reserve all the risks arising from the characteristics of the products themselves, relieving HAGAN® as the producer by any reliability issue regarding eventual damages caused to the user or third parties during the use of the product itself.

HAGAN® communicates that the pictures and descriptions included in this catalogue are indicative; HAGAN® reserves the right to modify or delete each product or process described in this user instructions manual.



HAGAN



Check out our 2017/2018 collection at

www.hagan-ski.com